




— MODEL — **55L**

# Pressure Relief Valve

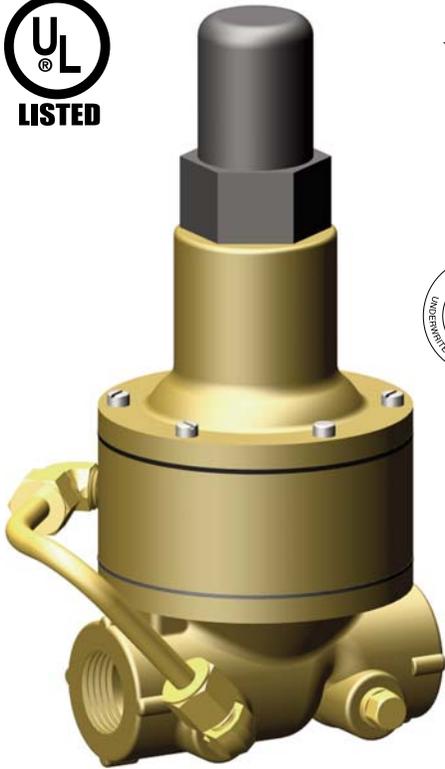

- **UL Listed**
- **Factory Mutual Approved**
- **Direct Acting - Precise Pressure Control**
- **Positive Dependable Opening**
- **Drip Tight Closure**
- **No Packing Glands or Stuffing Boxes**
- **Sensitive to Small Pressure Variations**


The Cla-Val Model 55L (**UL Listed FM approved**) Pressure Relief Valve is a direct-acting, spring loaded, diaphragm type relief valve. The valve may be installed in any position and will open and close within very close pressure limits.

The Model 55L is normally held closed by the force of the compression spring above the diaphragm. When the controlling pressure applied under the diaphragm exceeds the spring setting, the disc is lifted off its seat, permitting flow through the control. When control pressure drops below the spring setting, the spring forces the control back to its normally closed position. The controlling pressure is applied to the chamber beneath the diaphragm through an external tube on the 55L.

Pressure adjustment is simply a matter of turning the adjusting screw to vary the spring load on the diaphragm. The 55L is available in three pressure ranges; 0 to 75 psi, 20 to 175 psi, 100 to 300 psi. To prevent tampering, the adjustment cap can be wire sealed by using the lock wire holes provided in the cap and cover.

## Typical Applications

**Fire Protection System Service**  
Using the **Model 55L** in a fire protection system or other closed type system, prevents pressure build-up whenever line pressure exceeds the setting of the spring. The valve will relieve excess pressure to atmosphere preventing damage to the distribution network.

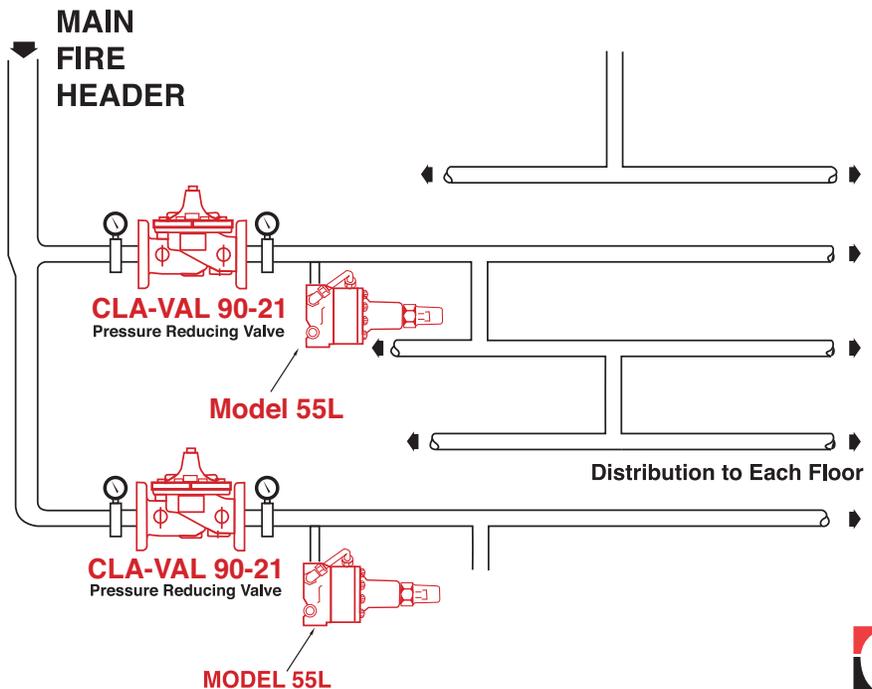

**Specifications**

**Size** 1/2" & 3/4" Threaded  
**Temperature Range** Water, Air: to 180°F Max.  
**Materials**  
 Body & Cover: Cast Bronze ASTM B62  
 Stainless Steel ASTM A743-CF-16Fa  
 Trim: Brass & Stainless Steel 303  
 Rubber: Buna-N® Synthetic Rubber

<b>UL Listed</b> 55L Range psi	Approximate Increase for Each Clockwise Turn of Adjusting Screw
20 to 175	28.0 psi

<b>FM Approved</b> 55L Range psi	Approximate Increase for Each Clockwise Turn of Adjusting Screw
0 to 75	8.5 psi
20 to 200	28.0 psi
100 to 300	18.0 psi

**Pressure Ratings** Cast Bronze 400 psi Max.  
 Stainless Steel 400 psi Max.

**Other Materials** Available on special order

**Adjustment Ranges** 0 to 75 psi  
 20 to 200 psi  
 100 to 300 psi



**Flow Loss Chart (Full Open Valve)**

Valve Size	C <sub>v</sub> Factor	Flow of Water - Gallons Per Minute				
		5	10	16	20	30
1/2"	6	0.7	2.7	6	11	--
3/4"	8.5	0.3	1.4	3.1	5.5	12.2

**When Ordering, Please Specify**

1. Catalog No. 55L
2. Valve Size
3. Adjustment Range Desired
4. Optional Materials

**55L Basic Valve Dimensions (In Inches)**

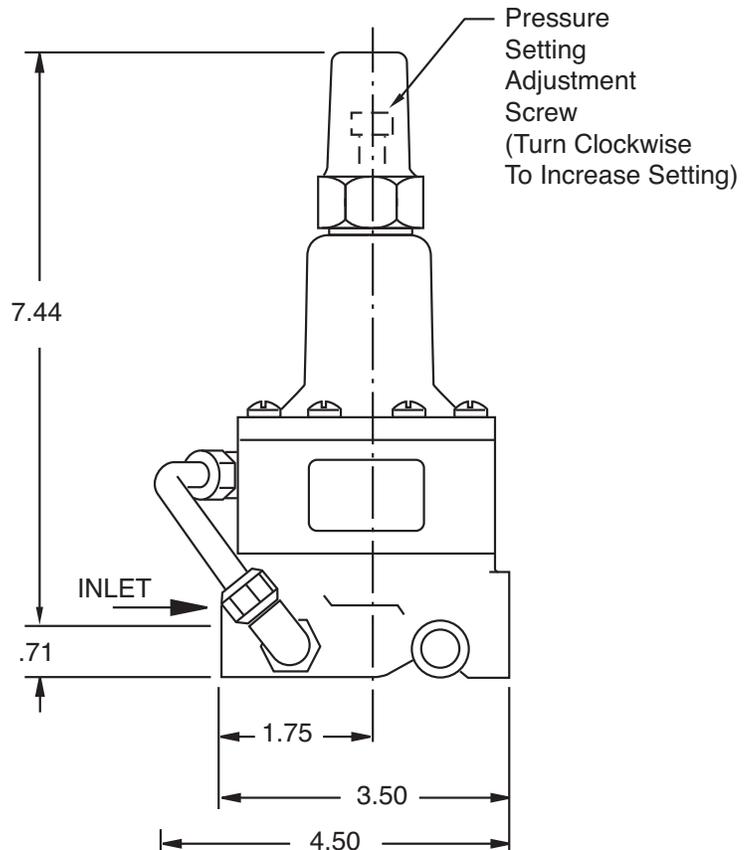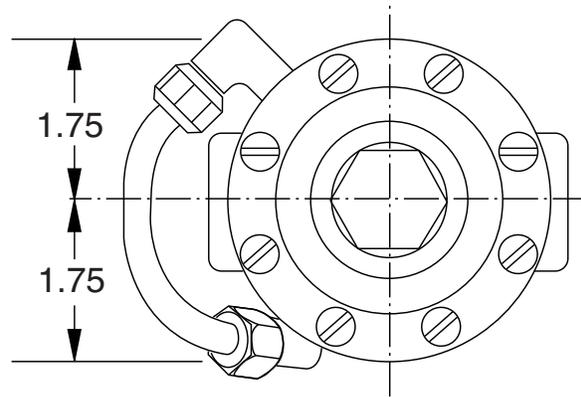

**0 to 75 and 20 to 175 psi design**



Distributed By:  
 M&M Control Service, Inc.  
 Phone: 800-876-0036  
 Fax: 847-356-0747  
 Email: sales@mmcontrol.com