

WEST

Control Solutions

Product Brochure

MAXVU



MAXVU

The new MAXVU is a cost effective temperature controller which is fast to configure, has improved display visibility and reduces costs by minimizing wiring and panel space.

At-a-Glance

Save Valuable Time - Set-Up in Under 60 Seconds

MAXVU has been specially designed for ease of use with a basic setup menu accessed from the front keypad.

- Includes 10 most common parameter settings
- Set-up in less than 60 sec for many applications
- Advanced set-up menu can also be accessed when needed

Alternatively fast configuration of multiple instruments can be achieved with the easy-to-use MAXVU PC Software.



Improve Process Monitoring with a High Visibility Display


The high visibility display provides increased clarity and enables vital process information and alarm messages to be viewed at a glance, even from a distance.

MAXVU's impressive large digits create the largest active display area for any 1/16DIN (48x48mm) controller and is equally impressive on the larger 1/8DIN version (96 x48mm).

MAXVU16




MAXVU8

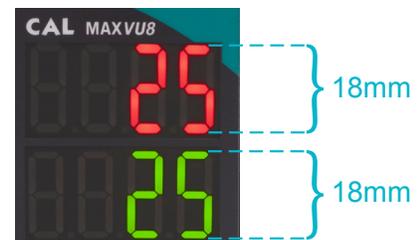

Reduce Space Required Behind-the-Panel

The short 67mm depth benefits installers by giving better access and reducing the panel depth required.

This results in MAXVU being easier to wire and quicker to install to save in overall costs.

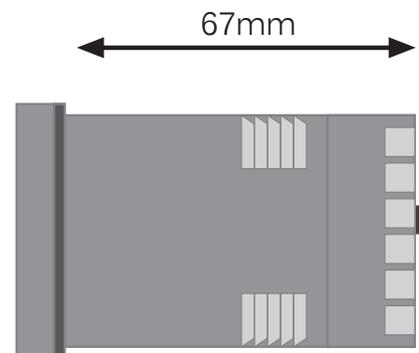

Key Features

CONTROL

MAXVU:

- PID or ON-OFF control
- 'Heat' only or 'heat & cool' strategy
- 2 alarms (absolute, deviation, band, loop)
- Latching or non-latching alarm outputs
- 1 or 2 point calibration
- Ramp/dwell with delay time
- Reset to defaults

INPUTS

- Thermocouple: B, C, J, K, L, N, R, S, T,
- RTD: PT100 2 or 3 wire,
- Linear ranges: 0/4 to 20mA, 0/1 to 5V, 0/2 to 10V

OUTPUTS

2 or 3 outputs; relay or SSR

INDICATORS

MAXVU: Output status

DISPLAY

1/16 DIN: 18mm upper, 10.2mm lower
1/8 DIN: 18mm upper, 18mm lower

COMMS

RS485 Modbus RTU
Integral configuration port

PROGRAMMING

Front keys or software programming

FACIA & KEYPAD


3 tactile keys



MAXVU Configuration Software

Controllers can be programmed quickly using the dedicated PC configuration tool via MAXVU's integral configuration port.

- Logical menu driven interface
- Tables with dropdown menus
- Graphical setup wizard with informative help panel
- Save configuration files
- Print report of controller settings

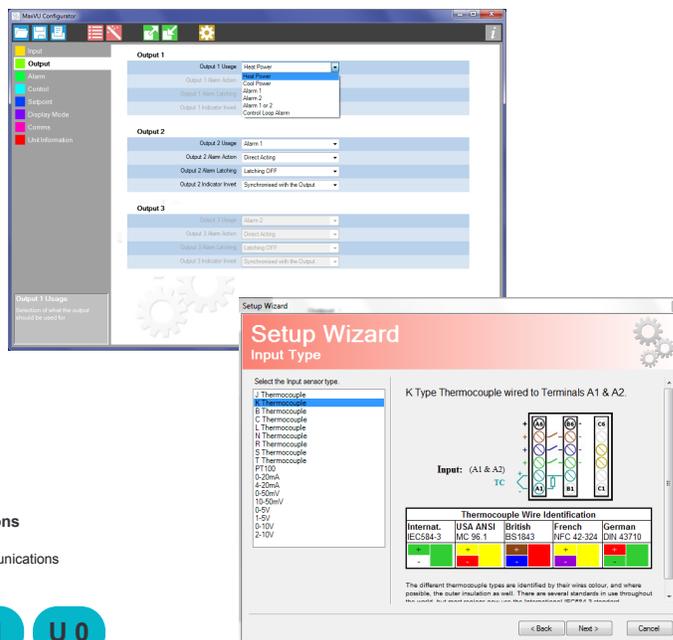

Ordering Code

MV	16	0	M	AA0	0	2	1	U0
Format	Supply Voltage	Communications						
16 1/16 DIN, 48 x 48mm	M 110 to 240V AC	0 Not Fitted						
08 1/8 DIN, 96 x 48mm	L 24V AC / DC	C RS485 Communications						
	Output							
	AA0 SSR SSR None	Out 1	Out 2	Out 3				
	AR0 SSR Relay None							
	RR0 Relay Relay None							
	AA0 SSR SSR Relay							
	AR0 SSR Relay Relay							
	RR0 Relay Relay Relay							

Flexible for Use in a Range of Applications

MAXVU provides an affordable solution for applications needing essential temperature control.

Packaging



- Bonding
- Shrinking
- Sealers
- Testing

Heated Enclosures



- Kilns
- Warming / Chilled Cabinets
- Ovens
- Incubators

Food and Beverage



- Tempering
- Microbrewing
- Food Processing

Plastic & Rubber Extrusion



- Barrel Heating
- Die Heating

General Heat Processes



- Fluid Baths
- Heated Blocks
- Trace Heating
- Heat Presses
- Thermal Bonding

And many more...