

# E-3 Pressure Regulating Valve

## DESCRIPTION

The Cash Acme E-3 Pressure Reducing and Regulating Valve automatically reduces a high inlet pressure to a lower delivery pressure and maintains the lower pressure within acceptable limits.

The Cash Acme E Series 3 provides substantially higher capacity and closer regulation for more demanding and higher quality installations.

The Cash Acme E Series 3 is designed for use where supply line inlet pressure does not exceed 300 psi and is suitable for either cold or hot (to 180° F) water service for a variety of applications. Standard factory outlet setting is 45 psi; other settings are available per the spring chart.

The Cash Acme E-3 incorporates a yoke-type design, allowing the regulator to close against the inlet pressure and provide quieter operation under wide and varying flow conditions.

## FEATURES AND BENEFITS

Automatically reduces a high inlet pressure to a lower delivery pressure:  
*Maintains a lower pressure within reasonably close limits.*


Every valve is tested for performance prior to shipping:  
*Specify and install with confidence!*

Solves problems of water hammer, pipe noise and rapid wearing of fixtures, faucets and valves:  
*Longer life of the valve saves money and time!*

Listed by ASSE 1003, IAPMO and CSA:  
*Inspector friendly, peace of mind!*

## SPECIFICATION



A pressure reducing valve shall be installed to deliver water at a controlled pressure. The valve shall be ASSE 1003 and IAPMO listed. The valve shall be a bronze body with a maximum inlet pressure of 300 psi. The valve shall have a separate clean-out plug that houses a Monel strainer screen. The valve shall be a yoke-type design with a buna seat disc and a stainless steel body seat. The valve shall be a **Cash Acme E-3 Pressure Regulating Valve**.

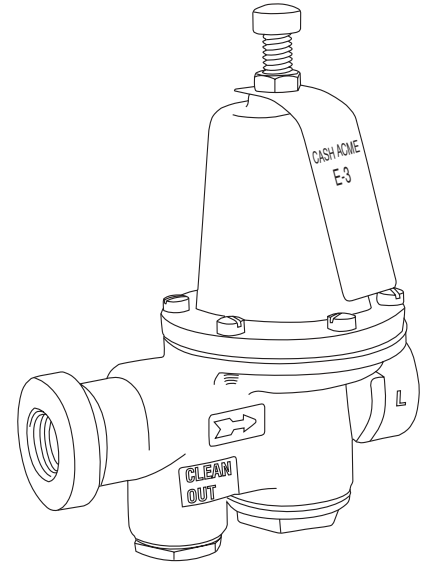

# E-3 Pressure Regulating Valve

## TYPICAL INSTALLATION

The E-3 Regulators should be installed in the horizontal position with the spring chamber upright. For other installation requirements, consult the factory.

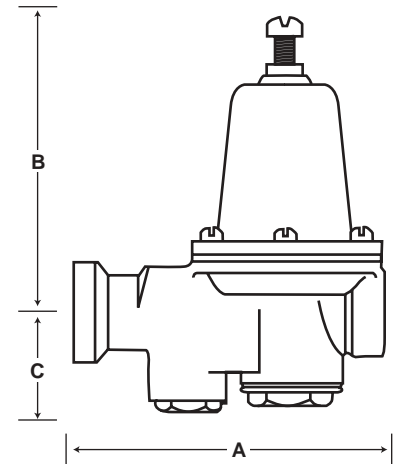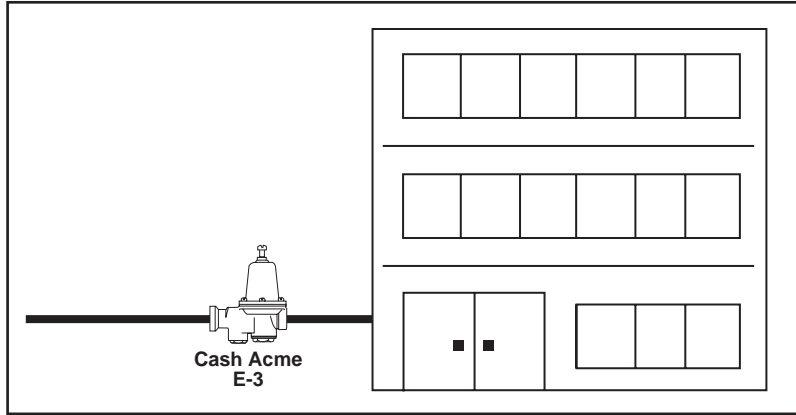

## SPECIFICATION DATA

### Performance:

- \*Outlet pressure range . . . . .20-70 psi
- Maximum temperature . . . . .180° F
- Maximum initial pressure . . . . .300 psi
- Service . . . . .Air and water
- \*Other pressure ranges are available, please contact the factory.

### Materials:

- Body: . . . . .Bronze
- Body Seat: . . . . .Stainless steel
- Spring Chamber: . . . . .Aluminum
- Seat Disc: . . . . .Buna-N
- Diaphragm: . . . . .EP/nylon
- Strainer Screen: . . . . .Monel
- Cleanout Plug . . . . .Bronze
- Adjustment Spring . . . . .Steel (zinc plated)

## CONNECTIONS (sold separately)

Threaded (NPT) . . . . .1/2", 3/4", 1", 1 1/4", 1 1/2" and 2"

## CERTIFICATIONS

The Cash Acme E-3 Pressure Regulator is certified to **ASSE 1003** and is listed by **ASSE** and **IAPMO (UPC)**.

Dimensions	A	B	C
1/2"	5"	5 1/4"	1 3/4"
3/4"	5 1/2"	5 15/16"	1 7/8"
1"	6 7/16"	7"	2 11/16"
1 1/4"	7 5/8"	7 1/2"	3"
1 1/2"	8 7/8"	8 1/2"	3 1/4"
2"	10 7/16"	10 1/4"	3 3/16"

Pipe Size	P <sub>2</sub> Variation (psi)	Water Capacity (gpm)			
		Differential Pressure P <sub>1</sub> -P <sub>2</sub> (psi)			
		10	25	50	100 Or More
1/2"	5	3	4	4 1/2	5 1/2
	10	6	8	10	11
	15	8	11	13 1/2	15
	20	9 1/2	13	15 1/2	17
3/4"	5	4	6 1/2	7 1/2	9
	10	8 1/2	12 1/2	16	17
	15	12 1/2	17 1/2	22	24
	20	15 1/2	21	26	28
1"	5	7	10	11	12
	10	15	20 1/2	25 1/2	27 1/2
	15	22	29	35 1/2	37 1/2
	20	28	35	41 1/2	44 1/2
1 1/4"	5	8 1/2	11	12	14
	10	20	27	33	36
	15	30	41	51	55
	20	40	53	65	70
1 1/2"	5	10 1/2	14	16	18
	10	27	38	48	52
	15	39	55	70	76
	20	50	72	92	100
2"	5	16	20	23	25
	10	37	52	65	70
	15	55	76	95	102
	20	70	97	120	130