

# Heatguard™ 110-H Series

## DESCRIPTION

The Heatguard™ 110-H is a Temperature Actuated Mixing Valve that mixes hot water with cold to deliver hot water at a reduced temperature.

The Heatguard™ 110-H has an outlet temperature range extending to 140° F, making it ideal for application in heating systems. It also has application in any installation requiring the delivery of reduced temperature hot water.


The Heatguard™ 110-H is a high quality mixing valve incorporating Thermostatic Technology. It features a robust design based on the expertise gained from years of experience in the design and manufacture of safety valves. Every valve is tested for performance on an automated testing station during the assembly process. The valve is ASSE 1017 listed.

The Heatguard™ 110-H incorporates a thermostatic element that senses the outlet water temperature and reacts to maintain a stable delivery temperature.

The Heatguard™ 110-H features a snap-on cover over a spindle mechanism that requires a special tool to adjust the temperature. The special tool is provided with each valve.

The Heatguard™ 110-H is available with 1/2", 3/4" and 1" on all three ports, via a union connection arrangement. A base valve without fittings and a range of additional Fittings Kits are also available.

The Heatguard™ 110-HX with an adjustable and lockable handle is also available.

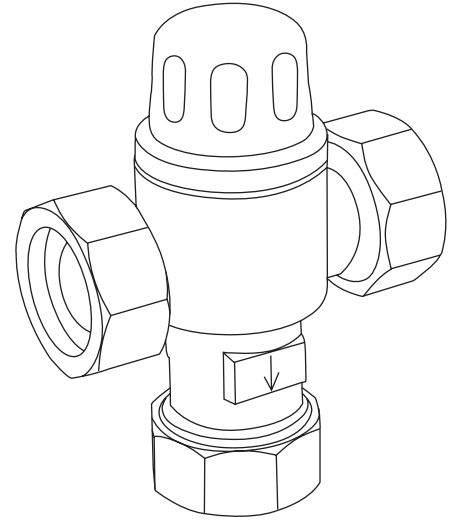

**HEATGUARD™**  
THERMOSTATIC MIXING VALVES

## FEATURES AND BENEFITS

High flow rate design for lower pressure losses within the system:  
*More efficient system performance for lower running costs.*

Every valve is tested prior to shipping:  
*Specify and install with confidence!*

Robust, low complexity construction:  
*Superior reliability, improved user safety.*

Integral union connections on all three ports:  
*Easy and quick to install and service.*

Unique, purpose designed adjuster tool:  
*Minimizes unauthorized tampering with valve setting.*

Listed by IAPMO (cUPC) and ASSE (1017):  
*Inspector friendly, peace of mind!*



## SPECIFICATION

A Temperature Actuated Mixing Valve shall be installed in conjunction with the water heating source to distribute tempered water to the system. The valve shall be ASSE 1017 and cUPC listed. The temperature actuated mixing valve shall control the delivered water temperature via a regulating piston made from engineering polymer. A special tool shall be required to adjust the outlet temperature and the adjusting mechanism shall be hidden by a snap-on cover. The valve shall be a Cash Acme Heatguard™ 110-H.

# Heatguard™ 110-H Series

## TYPICAL INSTALLATION

The Heatguard™ 110-H is a high performance Temperature Actuating Mixing Valve for use in heating systems.

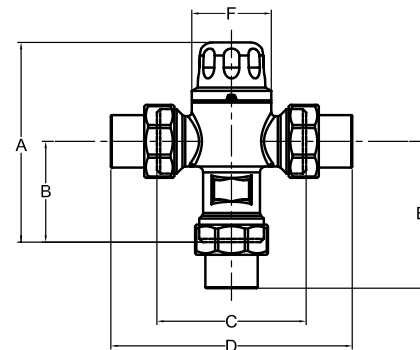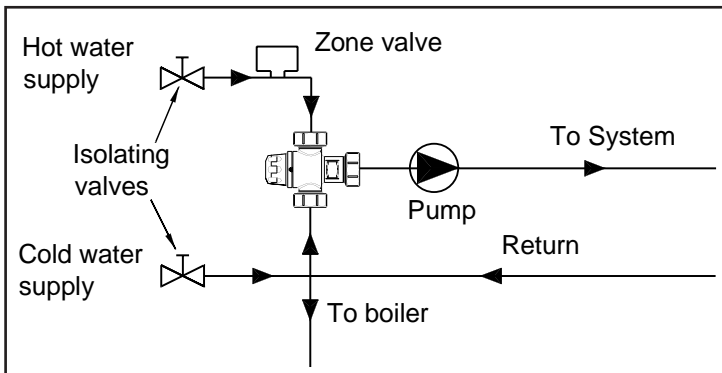

Dimensions	A	B	C	D	E	F
Base Valve	4.1 (103)	2.1 (52)	3.0 (76)	*	*	1.6 (41)
1/2" Sweat	4.1 (103)	2.1 (52)	3.0 (76)	4.4 (112)	2.6 (66)	1.6 (41)
3/4" Sweat	4.1 (103)	2.1 (52)	3.0 (76)	4.9 (124)	3.0 (76)	1.6 (41)
1" Sweat	4.1 (103)	2.1 (52)	3.0 (76)	7.2 (184)	4.2 (106)	1.6 (41)

\* Please Refer to Fittings Kits Spec. Sheet (CC001) for Dimensions.


## SPECIFICATION DATA

### Performance:

- Outlet temperature range . . . . .95 - 140° F (35 - 60°C)
- Temp. hot supply . . . . .195° F (90° C) max.
- Temp. cold supply . . . . .39 - 80°F (4 - 27°C)
- Temp. stability . . . . .+/- 5° F (3°C)
- Working pressure . . . . .Max. 145 psi (1,000 kPa)
- Flow rate, maximum . . . . .20 gpm
- Flow rate, minimum . . . . .1 gpm

### Materials:

- Body . . . . .Bronze, nickel plated
- Seals . . . . .Nitrile elastomer
- Springs . . . . .Stainless steel
- Fitting . . . . .Brass
- Internal . . . . .Brass
- Piston . . . . .Engineered polymer
- Guide tube . . . . .Engineered polymer

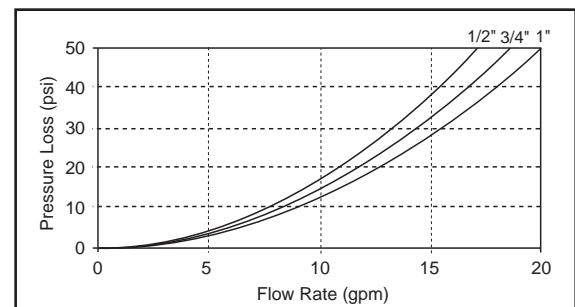

## CONNECTIONS (sold separately)\*

- Sweat . . . . .1/2", 3/4" and 1"
- Sweat w/ check . . . . .1/2" and 3/4"
- Barb . . . . .1/2", 3/4" and 1"
- Barb w/ Check . . . . .1/2", 3/4" and 1"
- Compression . . . . .1/4" ID (3/8" OD), 1/2" ID (5/8" OD), 3/4" ID (7/8" OD)
- Comp. w/ check . . . . .1/4" ID (3/8" OD), 1/2" ID (5/8" OD), 3/4" ID (7/8" OD)
- Threaded (NPT) . . . . .1/2" and 3/4"
- Threaded (NPT) w/ check . . . . .1/2" and 3/4"
- CPVC . . . . .1/2" and 3/4"
- CPVC w/ Check . . . . .1/2" and 3/4"

\*Also available complete with 1/2", 3/4" or 1" sweat fittings

## CERTIFICATIONS

The Cash Acme Heatguard™ 110-H is certified to **UPC, UPCC** and **ASSE**.