

Heatguard™ 160 Series

DESCRIPTION

The Heatguard™ 160 is a superior performance Thermostatic Mixing Valve that mixes hot water with cold to deliver tempered water at a constant temperature.

The Heatguard™ 160 is intended to supply controlled temperature hot water to any outlet requiring a higher level of protection, such as a tub or basin in a nursing home or lavatory faucets in a public place.

The Heatguard™ 160 is a high specification product incorporating the latest in Thermostatic Technology. It features a robust design based on the expertise gained from years of experience in the design and manufacture of safety valves. Every valve is tested through a range of tests on an automated testing station during the assembly process. The valve is ASSE 1016 listed for individual point-of-use applications.

The Heatguard™ 160 features a rapid response thermostatic element for superior control. The thermostatic element senses the outlet water temperature and reacts to maintain a constant delivery temperature even under changing flows or variations in supply temperatures or pressures. The valve also reduces the outlet flow to a trickle in the event of a cold water supply failure.

The Heatguard™ 160 features a snap-on cover over a spindle mechanism that requires a special tool to adjust the temperature. This special tool is provided with each valve.

The Heatguard™ 160 is available as a base valve with union connections to suit the range of Heatguard Fittings Kits with check valves in $\frac{3}{8}$ ", $\frac{1}{2}$ " and $\frac{3}{4}$ " sizes, including sweat, CPVC, PEX, threaded, compression and 4in1 service fittings.

FEATURES AND BENEFITS

Every valve is tested through a range of tests prior to shipping:
Specify and install with confidence!

Accurate temperature control, even under varying supply conditions:
Increased user comfort and convenience.

Robust, low complexity construction:
Superior reliability, improved user safety.


Total flow shut-off if cold supply fails:
Greater end user safety.

Unique, purpose designed adjuster tool:
Minimizes unauthorized tampering with valve setting.

Listed by IAPMO (UPC), ASSE (1016) and CSA (B-125).
Inspector friendly, peace of mind!

SPECIFICATION

A Thermostatic Mixing Valve shall be installed to deliver controlled temperature hot water to each fixture. The valve shall be ASSE 1016 and UPC listed. The thermostatic mixing valve shall control the delivered water temperature via a regulating piston made from engineering polymer. The valve shall have integral poppet style check valves on both inlets with a positive seal of the poppet onto an elastomer seat to prevent cross connection from hot to cold. A special tool shall be required to adjust the outlet temperature and the adjusting mechanism shall be hidden by a snap-on cover. The valve shall be a **Cash Acme Heatguard™ 160**.


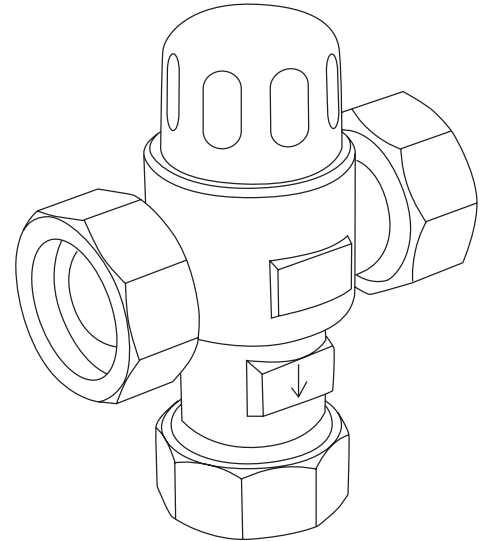


HEATGUARD™
THERMOSTATIC MIXING VALVES

Heatguard™ 160 Series

TYPICAL INSTALLATION

The Heatguard™ 160 is a high performance Thermostatic Mixing Valve (TMV) designed to deliver mixed water to a single outlet. It may also be used to supply multiple outlets.* It makes allowances for any change in supply conditions to ensure that the outlet water temperature remains constant.

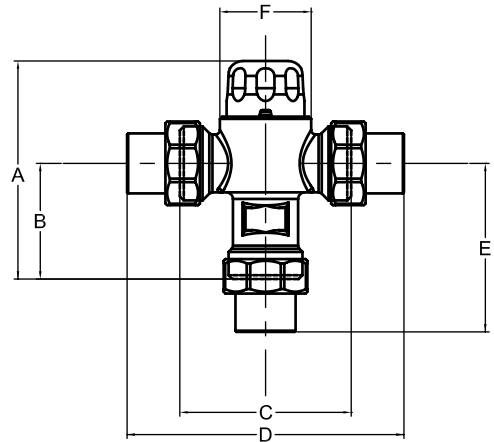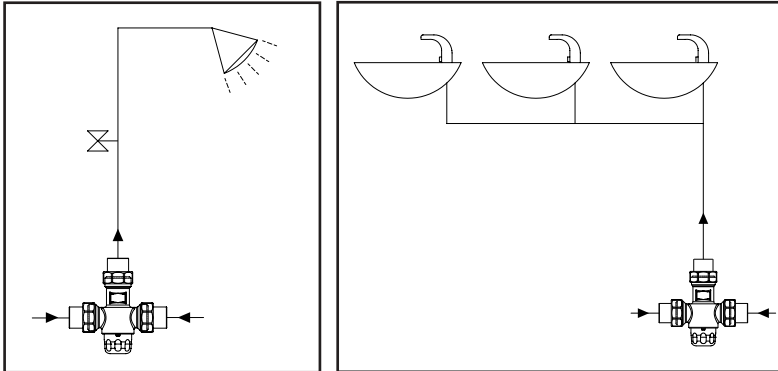

Dimensions	A	B	C	D	E	F
Base Valve	3.9 (98)	2.0 (52)	3.0 (76)	*	*	1.6 (41)

* Please Refer to Fittings Kits Spec. Sheet (CC001) for Dimensions.


SPECIFICATION DATA

Performance:

- Outlet temp. range95 - 115° F (35 - 46° C)
- Temp. hot supply195° F (90° C) max.
- Temp. cold supply40 - 80° F (4 - 27° C)
- Temp. stability+/- 3° F (1.7° C)
- Working pressureMax. 145 psi (1,000 kPa)
- Flow rate, minimum1 gpm (4 L/min)
- Flow rate, maximum11 gpm (42 L/min)

Materials:

- BodyBronze, nickel plated
- SealsNitrile elastomer
- SpringsStainless steel
- FittingBrass
- InternalBrass
- PistonEngineered polymer

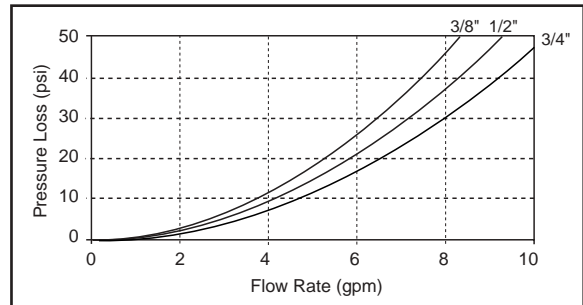

CONNECTIONS (sold separately)

- Sweat1/2", 3/4" and 1"
- Sweat w/ check1/2" and 3/4"
- Barb1/2", 3/4" and 1"
- Barb w/ Check1/2", 3/4" and 1"
- Compression1/4" ID (3/8" OD), 1/2" ID (5/8" OD), 3/4" ID (7/8" OD)
- Comp. w/ check1/4" ID (3/8" OD), 1/2" ID (5/8" OD), 3/4" ID (7/8" OD)
- Threaded (NPT)1/2" and 3/4"
- Threaded (NPT) w/ check1/2" and 3/4"
- CPVC1/2" and 3/4"
- CPVC w/ Check1/2" and 3/4"

CERTIFICATIONS*

The Cash Acme Heatguard™ 160 is certified to **CSA, ASSE** and **UPC** for individual point-of-use applications.