




Series
DPMW

LCD Digital Panel Meters

3-1/2 Digits, Window Mount

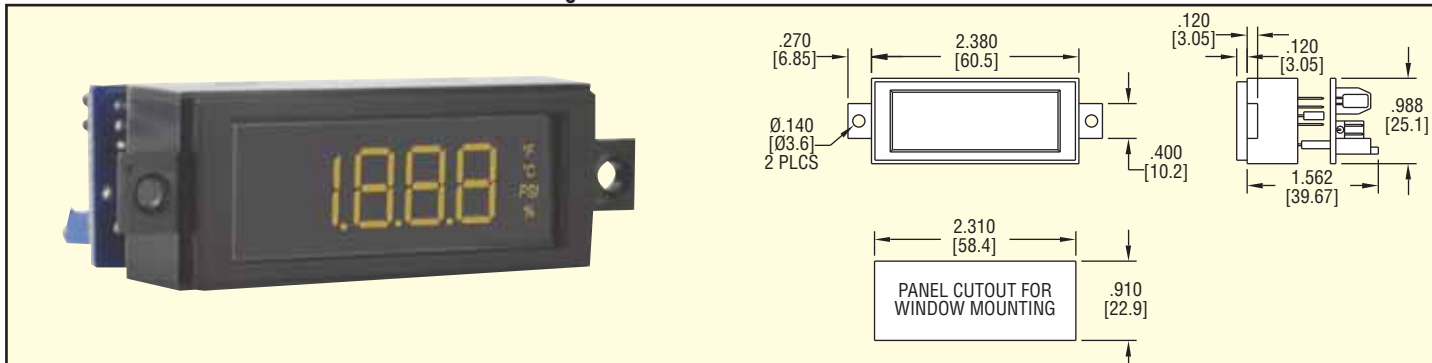

The Series DPMW LCD Digital Panel Meter is designed with a 3-1/2 digit, high contrast LCD display. The colored segments are available in red, amber, or green - ideal for viewing at a distance. The Series DPMW features user selectable engineering units, selectable decimal point position and adjustable zero and span. The meter accepts a 4 to 20 mA input signal for pressure, level, flow, and temperature transmitter. A 24 VDC power supply is required to illuminate the colored segments. The Series DPMW can be quickly installed in a window cutout.

Model	Backlighting
DPMW-401	Amber Segments
DPMW-402	Green Segments
DPMW-404	Red Segments

ACCESSORY

DPM-24P, Regulated 120 VAC to 24 VDC Power Supply

SPECIFICATIONS

Inputs: 4-20 mA DC.

Input Impedance: 300Ω nominal.

Accuracy: ±(0.1% FS + 2 count).

Power Supply: 24 VDC @ 35 mA typical.

Span and Zero: Adjustable. (± 1999).

Display: 3-1/2 digits, 7 segments, 0.45" (11.4 mm) H.

Decimal Points: 3-position, user selectable.

Annunciator: °F, °C, %, psi.

Polarity: Automatic, "-" displayed.

Operating Temperature: 32 to 122°F (0 to 50°C).

Storage Temperature: -4 to 158°F (-20 to 70°C).

Mounting: Window mount.

Connection: Screw terminals.

Weight: 2 oz (56.7 g).

Conversion Rate: 3 per second.

Warm-Up: 10 minutes typical.

Distributed By: M&M Control Service, Inc. www.mmcontrol.com/Love_Controls.php

800-876-0036 847-356-0566