




TEL-TRU FOOD SERVICE THERMOMETERS



- Food/Beverage Processing
- Food Service
- Barbecue
- Cooking
- OEM Equipment
- Retail

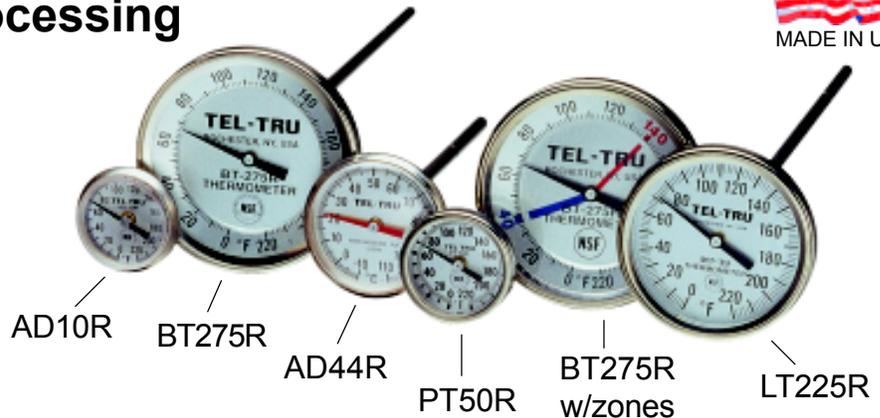

Professional Bimetal Thermometers NSF® Approved

APPLICATION	TEMPERATURE RANGES	DIAL SIZE	MODEL CODES		LENS	CONN. LOC.	AVAILABLE STEM LENGTHS				
			MODEL	MODEL			5"	8"	12"		
<ul style="list-style-type: none"> • Spot Check & Testing • Meat Cooking • Fat/Candy • High Temp. Cooking • High Temp. Holding • Low Temp. Holding 	<ul style="list-style-type: none"> • 0/220°F • 50/500°F ** • -40/160°F ** 	1"	1210	PT50R	*Lexan	Back	X				
			1219	AD10R	*Lexan	Back	X				
				1 3/8"	4419	AD44R	*Lexan	Back	X		
				1 3/4"	1310	MT39	Glass	Back	X	X	
				2"	2310	LT225R	Glass	Back	X	X	X
		2610	BT275R		Glass	Back	X	X			
• Meat Cooking	• 140/180°F		2510	RM275R	Glass	Back	X				

* Lexan can **NOT** be exposed to continuous high temperatures.
 ** Designed for use in oven. Has specially designed pressure compensating ring.
 • The "R" in the model number denotes recalibration feature.

Barbecue Thermometers

APPLICATION	TEMPERATURE RANGES	DIAL SIZE	MODEL CODES	MODEL	NPT	ZONES	LENS	CONN. LOC.	STEM LENGTHS 2 1/2", 4", and 6"
• Barbecue Pit	• 50/500°F	2"	3110	BQ250	Flat Bushing w/clip	NO	Glass	Back	X
• Barbecue Grill									
• Smoke/Cooker	• 100/500°F	3"	351L	BQ300	1/4"	YES	Glass	Back	X

Professional Bimetal Thermometers NSF® Approved

APPLICATION	TEMPERATURE RANGE	DIAL SIZE	MODEL CODES	MODEL	NPT	LENS	CONN. LOC.	STEM LENGTHS 2 1/2", 4", and 6"
• Ware Washing	• 20/240°F	2"	2010	GT225	1/4"	Glass	Back	X

• OEM Equipment Food/Dairy/Beverage Processing see product literature brochure #8910.
 • Accuracy ±1%.
 • **OTHER TEMPERATURE RANGES AVAILABLE.**

Tel-Fast Non-Contact Thermometers

PRODUCT	MODEL	LASER TARGETING	RANGE	KEY FEATURES	COMMENTS
Tel-Fast Non-Contact Thermometers	QTL1	YES	0 to 600°F/C	Surface temperature measurement without touching the item being checked. Tel-Fast units have a 1 year warranty.	Prevents <i>cross-contamination</i> problems. Includes free carrying case. Switchable readout Fahrenheit or Centigrade.
	QT1	NO	0 to 600°F/C		
	QTL3	YES	-67 to 280°F/C		
	QT3	NO	-67 to 280°F/C		

HACCP...Temperature A Critical Control Point?

ACCURATE THERMOMETERS MEAN BETTER FOOD SERVED AND SAFER FOOD SERVICE

Tel-Tru Check-Temp Calibrators will assure accurate food temperatures during processing/smoking, preparing/cooking, holding/serving, and cooling/storage. As part of your HACCP Program, use Tel-Tru Check-Temp Calibrators to verify the accuracy of your food service and laboratory thermometers.

RELIABLE ACCURACY

- Each unit serialized and certified traceable to NIST.
- Built in circuitry to warn if unit is more than 1°F out of calibration.
- Accuracy $\pm 0.2^\circ\text{F}$.

TEMPERATURE UNITS - Check & calibrate at *your* critical temperature point.

- 40°F and 160°F - **NEW** dual cold/hot unit.
- 40°F - Low temperature holding.
- 140°F - High temperature holding.
- 160°F - Temperature at which E. Coli and other pathogens are killed.

SIMPLE SET UP - Plug in and turn it on!

Use With Dial Type Thermometers - A built in tool for holding the calibration nut makes adjustments **FAST & EASY**.

Use With Digital Thermometers - Compare actual performance to accuracy specifications.

OTHER CUSTOM TEMPERATURE MODELS AVAILABLE

Accuracy Certified to National Institute for Standards and Testing. U.S. patent #5,678,923

Tel-Tru Check-Temp Calibrators

PRODUCT	MODEL	RANGE	KEY FEATURES	COMMENTS
Tel-Tru Check-Temp Calibrators	Check-Temp 40 Check-Temp 140 Check-Temp 160	40°F 140°F 160°F	Stable single temperature point heat source. Patented holding feature of calibrator and use of dial adjustment tool make calibration <i>quick</i> and <i>easy</i> .	Verify the accuracy of all thin stem thermometers quickly . Allows for easy re-calibration of any thin stem dial thermometer with a $\frac{3}{8}$ ", $\frac{7}{16}$ ", or $\frac{5}{8}$ " hex calibration nut. Accuracy $\pm 0.2^\circ\text{F}$.
	Check-Temp II	40°F and 160°F	NEW dual cold/hot unit, toggle between 40°F and 160°F.	
Tel-Tru Check-Temp Service	Annual Re-Certification and Maintenance Notification Service	N/A	A program for recertifying and maintenance for calibrator owner. One week turnaround from receipt of unit.	Tel-Tru will contact the Check-Temp owner, 1 year after receipt of warranty return reply registration card, to advise owner that re-certification is due.

Accessories

PART NUMBER

- **Pocket Sheath** - MT39, MT39R 5" Stem CASE-3
- **Pocket Sheath** - MT39, MT39R 8" Stem CASE-2
- **Pan Clip** - .150 diameter stem (available with other stem diameters) 1112401
- **Mounting Flange** - 1" dial size - Round stainless steel - Models PT50/PT50R 1114501
- **Mounting Flange** - 1" dial size - Oval stainless steel - Models PT50/PT50R 1114601
- **Mounting Flange** - 2" dial size - Round stainless steel - Models LT225/LT225R 1114701
- **Mounting Flange** - Thermometers with 1/2" NPT connection 96001301

VISIT OUR WEB SITE AT www.teltru.com



TEL-TRU MANUFACTURING CO.
408 St. Paul Street
Rochester, New York 14605 USA

F.O.B. Rochester, NY USA
Part # FSG00

Phone: 800-232-5335 • 716-232-1440
Fax: 716-232-3857
E-mail: info@teltru.com • Web: www.teltru.com